

Coaxial Surge Protectors (SPD's)

Part Number: **N-JP-1S**



Features:

- High reliability protection from surges caused by lightning or other electrical transients
- Meets IEC 61643-21 compliance, Category C2 & D1 Impulse Requirements
- High energy / low capacitance GDT technology
- High durability and RoHS Compliant
- Low insertion loss
- High frequency and bidirectional




100% Lead-Free (RoHS Compliant)

Electrical Characteristics	
Frequency Range	DC - 3GHz
DC Breakdown (Turn-On) (100V/s)	≥ 120V
Voltage Protection Level - U_p (Impulse Breakdown V)	≤ 900V
Technology Type	Gas Discharge Tube (GDT)
Insertion Loss	< 0.2dB
Return Loss	≥ 20dB
VSWR	< 1.2:1
Maximum Power	10W
Maximum Current - Category C2 (8/20 μ s)	5kA (10 times), 10kA (1 time)
Maximum Current - Category D1 (10/350 μ s)	2.5kA (2 time)
Impedance	50 Ω
Insulation Resistance (at 100V _{DC})	≥ 500M Ω
Mechanical Characteristics	
Connector Type	N Type (P-J)
Connection Method	Series (Bidirectional)
Grounding	Screw
Weight	80g (2.82oz)
Environmental Characteristics	
Environmental Rating	IP20
Operating Temperature Range	-40°C to +70°C (-40°F to 158°F)
Maximum Operating Altitude	2000m (6562ft)
Relative Humidity	≤ 90%

Applications:

- Wireless (WiFi) Communications
- Measuring Instruments
- Transmitters and Receivers
- Tower Equipment (TTE and TMA)
- Wimax Broadband
- Antenna Systems
- High Frequency Coaxial Lines using N-type Connectors

External view

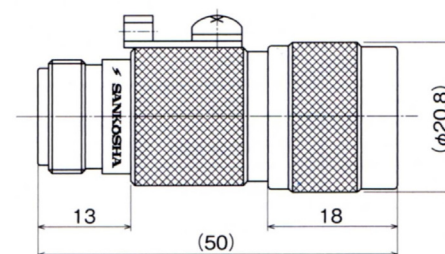

Units: mm