


Two Electrode Surface Mount Gas Tube Arrester

Part Number: **SD4-230**




Features:

- 4.4 x 3.5 mm footprint
- Ideal for surface mount applications
- Non-Radioactive
- 100% Lead-Free (RoHS Complaint)
- Low Capacitance
- Proven Performance
- ISO 9001 Certified
- World Renowned Quality

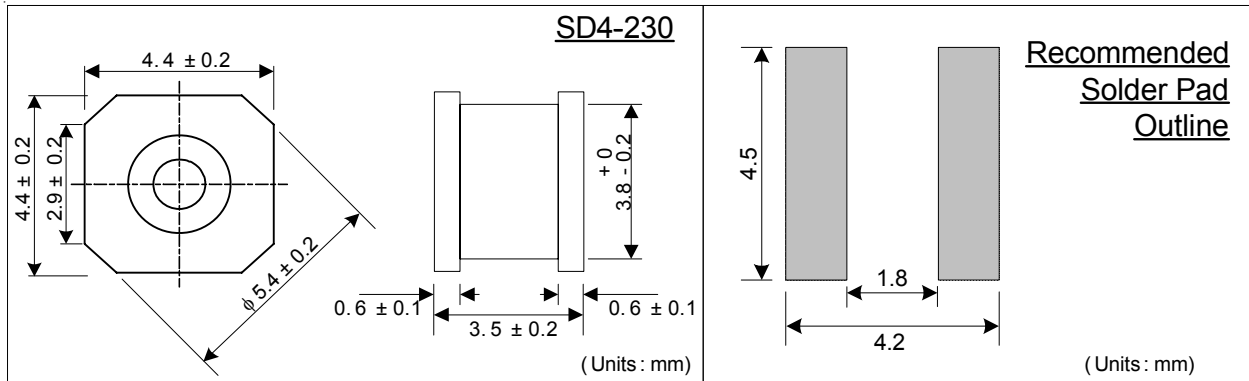

Applications:

- Transient Voltage Surge Suppression
- Cable Telephony Products
- Modems/Cable Modems
- Broadband/CATV/Coaxial Protectors
- xDSL Modems and Peripherals
- Building Entry/Outside Plant

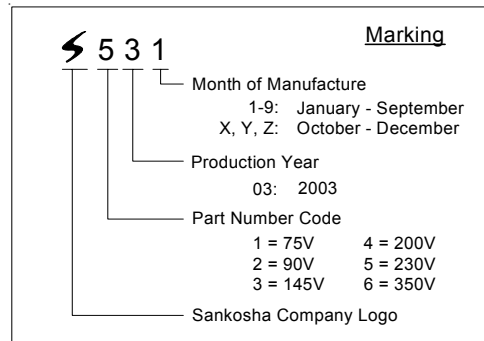

Electrical Characteristics

1.	DC Breakdown Voltage	100 V/sec	230V ± 20%		
2.	Impulse Breakdown Voltage	1 kV/μsec	< 650V		
3.	Insulation Resistance	DC 100V	> 10,000 M-ohm		
4.	Capacitance	1 MHz	< 0.5 pF		
5.	DC Holdover Voltage	See Note	< 135V	Note: Measured in accordance with ITU-T K.12.	
6.	Impulse Life	10/1000 μsec	50A	> 300 times	
7.	Impulse Discharge Current	8/20 μsec	2.5 kA	1 Time	
8.	AC Discharge Current	50 Hz	One Second	5 A	1 Time

After Life Tests

9.	DC Breakdown Voltage	100 V/sec	230 ± 30%		
10.	Impulse Breakdown Voltage	1 kV/μsec	< 700V		
11.	Insulation Resistance	DC 100V	> 100 M-ohm		

SANKOSHA

SANKOSHA