


# Two Electrode Gas Tube Surge Arrester

Part Number: U-10A / U-10B



Applications:

- Transient Voltage Surge Suppression (TVSS)
- Cable Telephony Products
- Modems/Cable Modems
- Broadband/CATV/Coaxial Protectors
- xDSL Modems and Peripherals
- Building Entry/Outside Plant

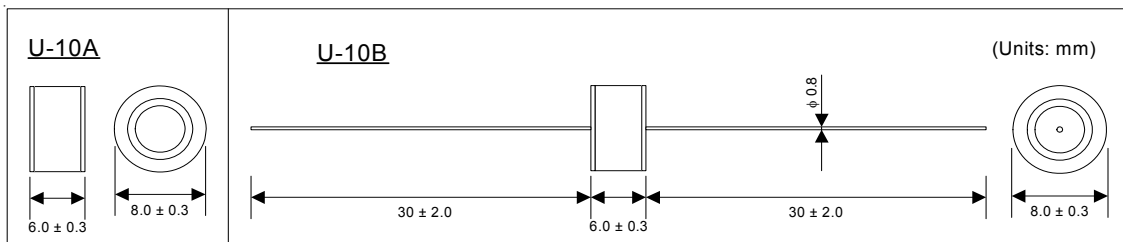

Features:

- UL 497B Recognized
- UL File E140906
- Non-Radioactive
- 100% Lead-Free (RoHS Compliant)
- Low Capacitance
- Proven Performance
- ISO 9001 Certified
- World Renowned Quality

Marking

U-10 B 01 4 ⚡

- Sankosha Company Logo
- Month of Manufacture  
1-9: January - September  
X, Y, Z: October - December
- Production Year  
01: 2001
- Lead Configuration
- Part Number

**Electrical Characteristics**

1.	DC Breakdown Voltage	100 V/sec	600V ± 15%		
2.	Impulse Breakdown Voltage	100 V/μsec	≤ 800V		
		1 kV/μsec	≤ 1000V		
3.	Insulation Resistance	DC 250V	≥ 10,000 M-ohm		
4.	Capacitance	1 MHz	≤ 1.0 pF		
5.	DC Holdover Voltage	See Note	≤ 150V	Note: ITU-T K.12 or IEEE C62.31-1987 Test Circuit	
6.	Impulse Life	10/1000 μsec	500 A	500 Times	
7.	Impulse Discharge Current	8/20 μsec	10 kA	1 Time	
		8/20 μsec	5 kA	Each Polarity 5 Times	
8.	AC Discharge Current	50 Hz	9 Cycles	65 A	1 Time
		50 Hz	One Second	10 A	10 Times

**After Life Tests**

9.	DC Breakdown Voltage	100 V/sec	600 ± 50%		
10.	Impulse Breakdown Voltage	100 V/μsec	≤ 1200V		
11.	Insulation Resistance	DC 50 V	≥ 1 M-ohm		

SANKOSHA

SANKOSHA