



Two Electrode Gas Tube Surge Arrester

Part Number: **Y-302B**

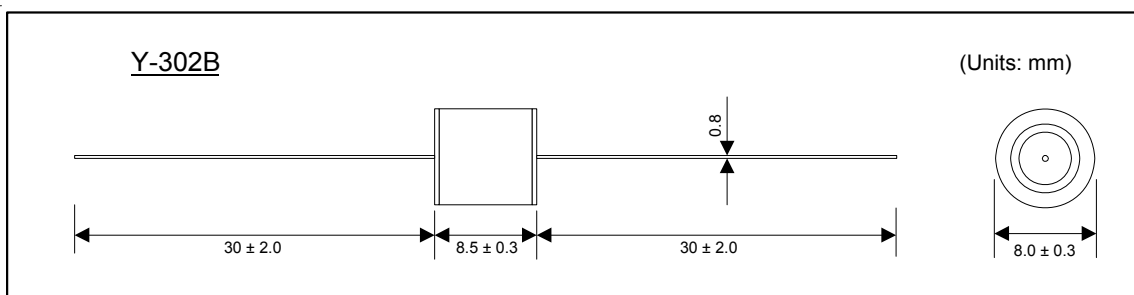


- Features:**
- UL 1449 Listed (File E328370)
 - Non-Radioactive
 - 100% Lead-Free (RoHS Compliant)
 - Low Capacitance
 - Proven Performance
 - ISO 9001 Certified
 - World Renowned Quality

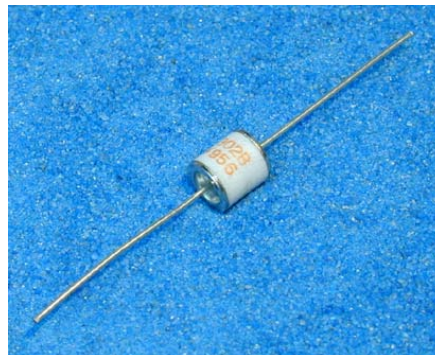

Applications:

- Transient Voltage Surge Suppression (TVSS)
- AC Line Input Protection
- Power Supplies
- CATV Systems
- Antennas
- Digital Satellite Systems (DSS)

Marking

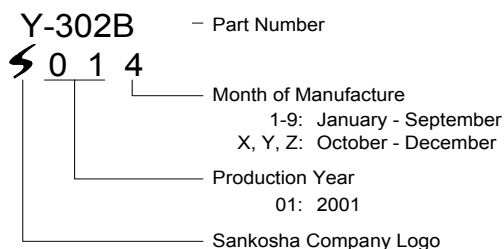

Electrical Characteristics

1.	DC Breakdown Voltage	100 V/sec	3000V ± 20%		
2.	Impulse Breakdown Voltage	100 V/μsec	< 4000 V		
3.	Insulation Resistance	DC 1000 V	> 10,000 M-ohm		
4.	Capacitance	1 MHz	< 1.0 pF		
5.	Impulse Discharge Current	8/20 μsec	1 kA	Each Polarity 5 Times	3 Min. Intervals
		8/20 μsec	10 kA	1 Time	
6.	Impulse Life	10/1000 μsec	500 A	10 Times	
7.	AC Discharge Current	50 Hz	9 cycles	5 A	1 Time
		50 Hz	One Second	1 A	10 Times

After Life Tests

8.	DC Breakdown Voltage	100 V/sec	3000V ± 50%		
9.	Impulse Breakdown Voltage	100 V/μsec	< 6000 V		
10.	Insulation Resistance	DC 1000 V	> 1 M-ohm		

SANKOSHA

SANKOSHA